

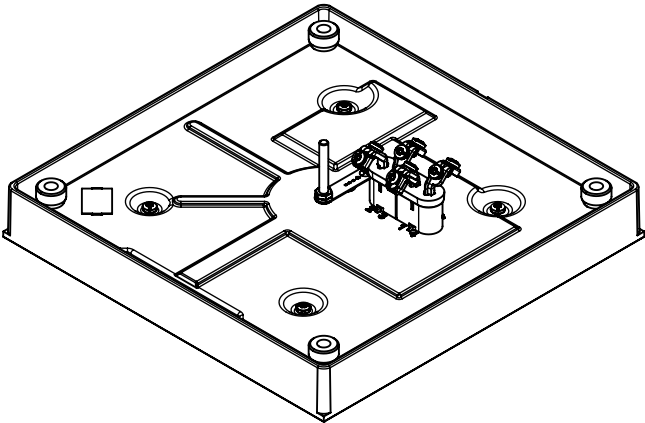


document id.: 11.33460.19X-101-10-A / state: 230 - released
view date: 2019-11-26 12:07:50 / user: MARIAN

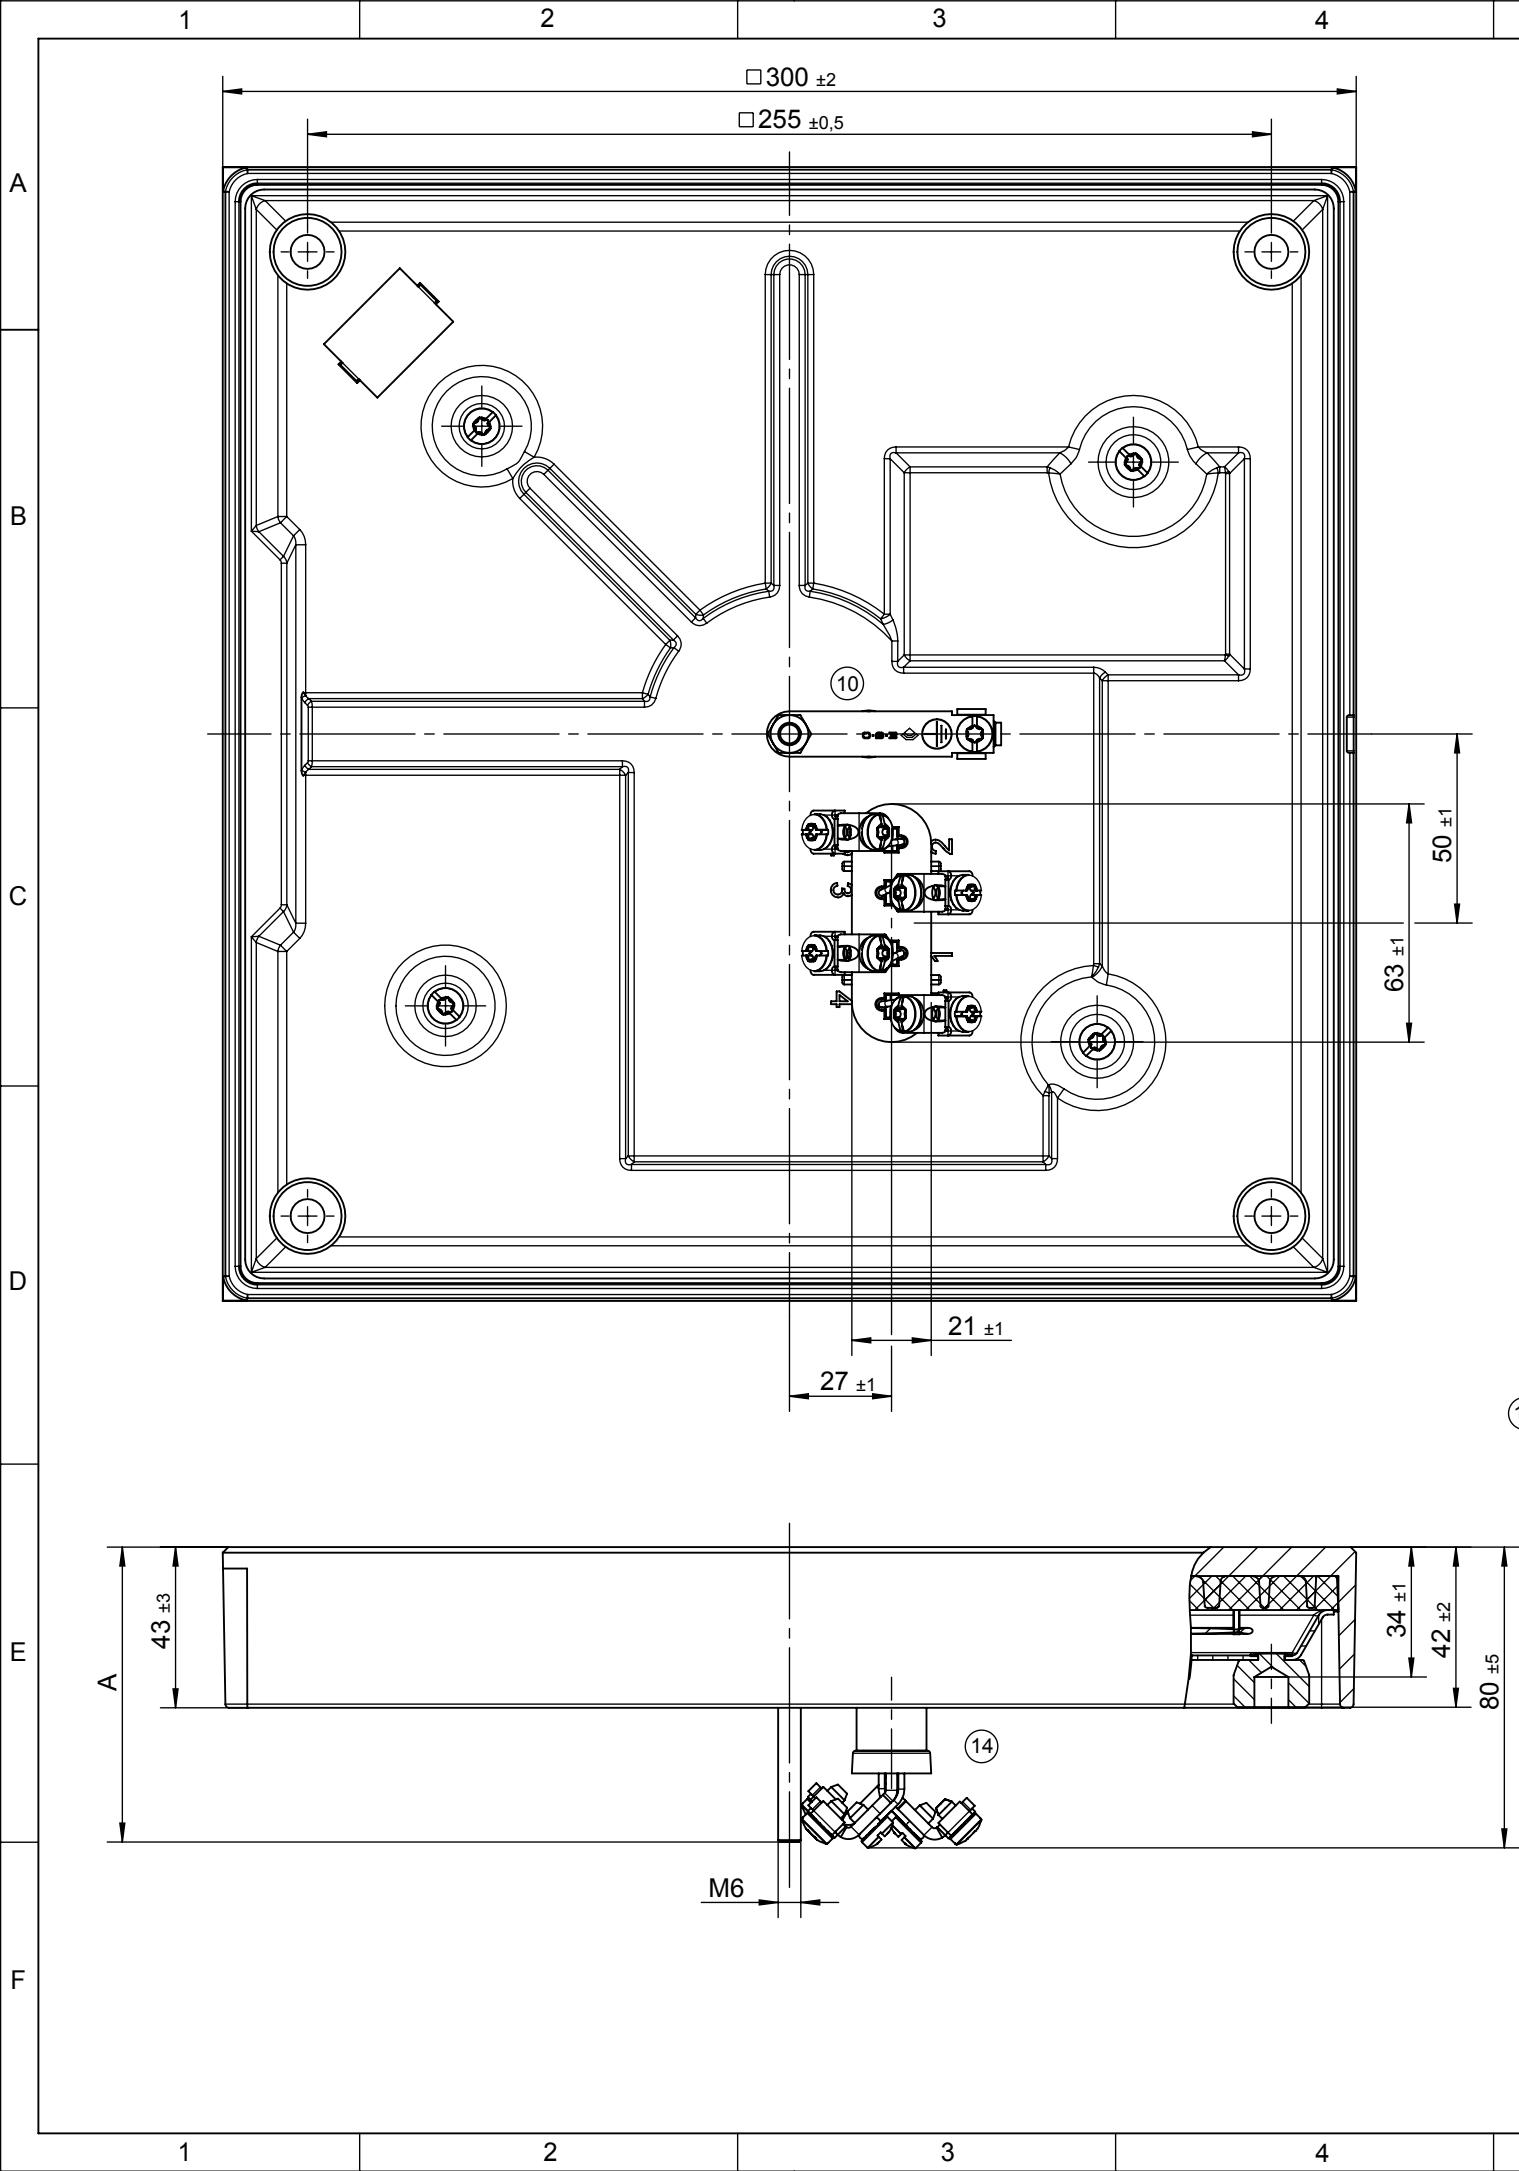

voltage marking
230 V without
240 V blue
400 V red
other green


connection
4 straps with clamp
bracket and screws M5

earthing
with connecting lug
clamp bracket and
screw M5


mounting
The hotplate is to
support on the 4
supporting disks

At higher temperature the
protector switches back to
the rest wattages.
Rest wattage by:
4000 W = 2000 W
3000 W = 1750 W
2500 W = 1250 W

wiring diagram

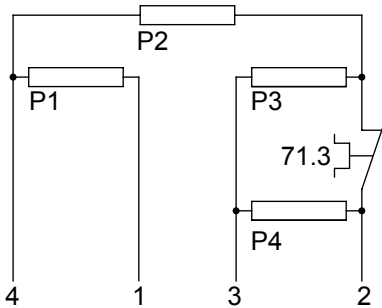

12

5	11.33460.198	2500	230	625	625	625	625	2500	1875	1250	625	420	250	X		78±5	
4	11.33460.197	3000	400	750	750	500	1000	3000	2250	1500	750	500	300	X		78±5	
3	11.33460.196	4000	440	1500	1000	1000	500	4000	2500	1500	1000	600	430	X		78±5	
2	11.33460.195	4000	400	1500	1000	1000	500	4000	2500	1500	1000	600	430	X		78±5	
1	11.33460.194	4000	230	1500	1000	1000	500	4000	2500	1500	1000	600	430	X		78±5	
Pos	Type	Wattage	Voltage	Rated conductor				Switch positions						 ③ Appro.	 "A" in mm		
14	A01938		This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.					Blank No.						EN Mat.No.		Scale Unit mm	
13	A01475	2012-10-22						Material								Scale 1:2	
12	A01474	2012-10-19															
11	A01469	2012-10-09															
10	A01455	2012-08-09															
9	A01428	2012-07-31	CAD	Date	Name	Designation											
8	A01403	2012-06-13	Creat.	2019-01-15	MAKUCJ	EGO Com. Hotplate 300x300											
Cha.	Information No.	Date	Proc.	2019-02-04	MAKUCJ												
F.Rel.	0036EP	1992-09-17	Rel.	2019-06-18	KOVACICB												
								document id. 11.33460.19X-101-10-A						Stat. F	Sheets	Doc.	Ex.Doc.
Origin			Repl.for 11.33460.40_					Repl.by					Ref.				