

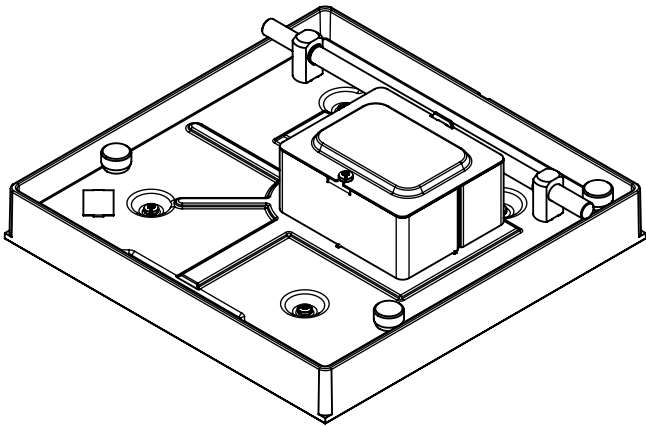


document id.: 11.33460.30X-101-01-B / state: 230 - released
view date: 2019-10-02 07:09:59 / user: MARIAN

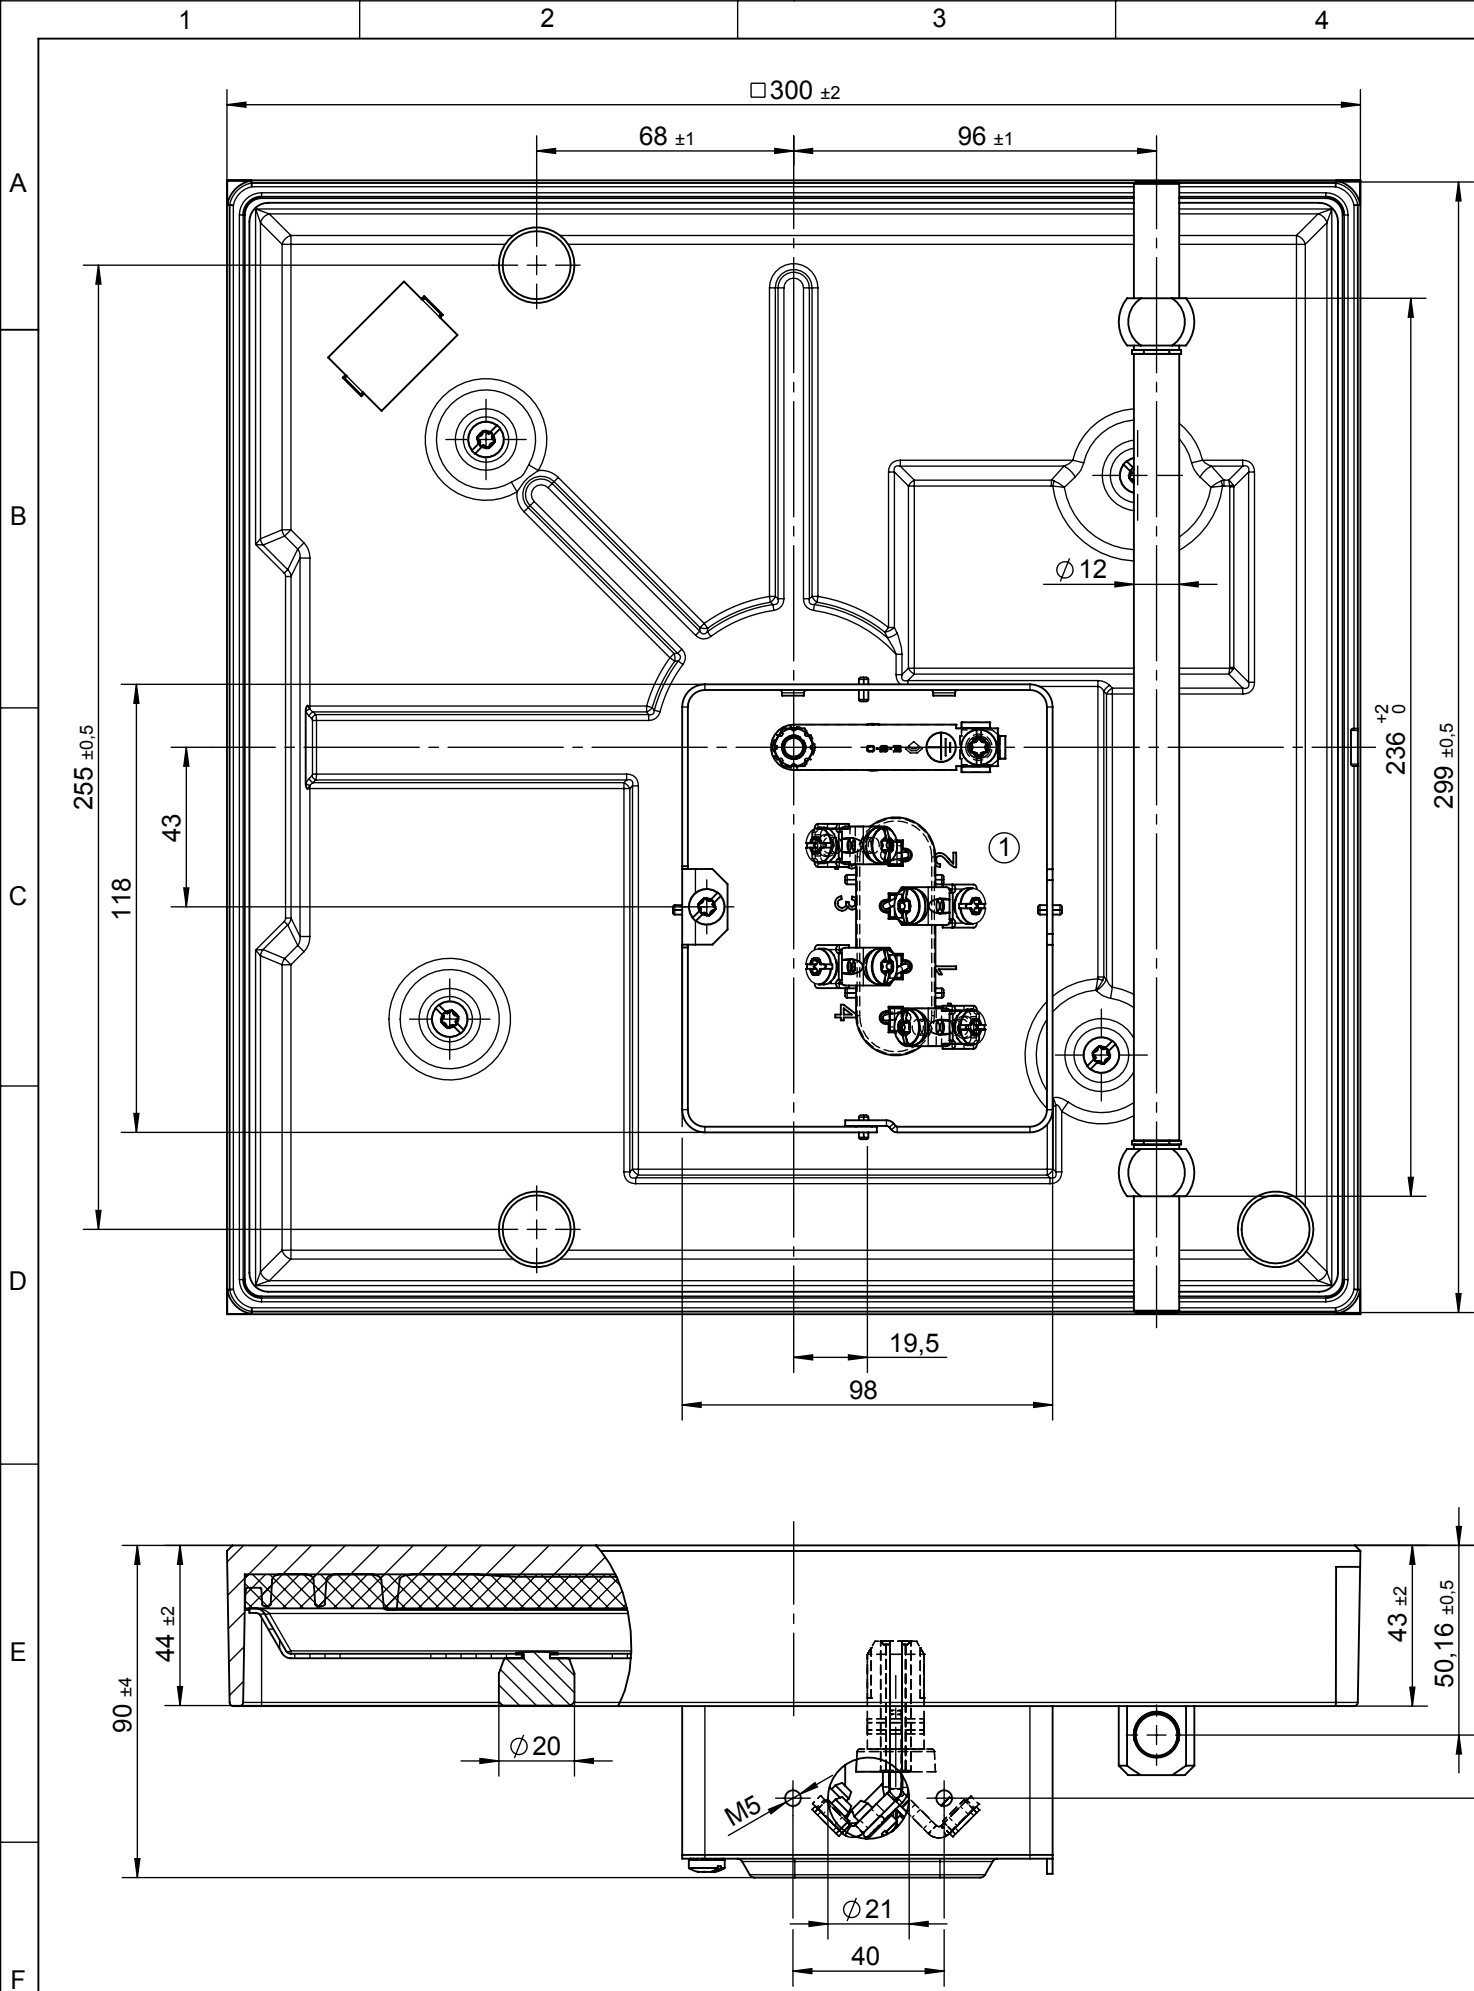


voltage marking
230 V without
240 V blue
400 V red
other green

connection
4 straps with clamp
bracket and screws M5

earthing
with connecting lug
clamp bracket and
screw M5

At higher temperature the
protector switches back to
the rest wattages.
Rest wattage by:
2500 W = 1875 W
3000 W = 1750 W
4000 W = 2000 W

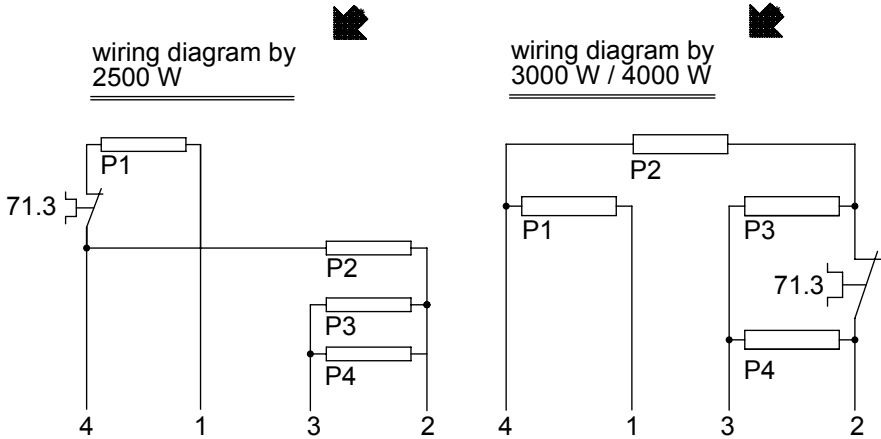

2	11.33460.305	3000	230	750	750	500	1000	3000	2250	1500	750	500	300	X		
1	11.33460.302	2500	230	625	625	625	625	2500	1875	1250	625	420	250	X		
	①	W	V	P1	P2	P3	P4	6	5	4	3	2	1			
Pos	Type	Wattage	Voltage	Rated conductor				Switch positions						Appro.		
			This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.					Blank No.		EN Mat.No.				Scale Unit		
								Material						mm		
								Surface Texture		ISO 1302				Scale		
								General Tolerances						1:2		
																
			CAD	Date	Name		Designation									
0	A01938		Creat.	2019-05-28	MAKUCJ		EGO Com. Hotplate 300x300									
Cha.	Information No.	Date	Proc.	2019-05-28	MAKUCJ											
F.Rel.	A01454	2012-08-09	Rel.	2019-06-18	KOVACICB											
							document id.						Stat.	Sheets	Doc.	Ex.Doc.
							11.33460.30X-101-01-B						F			
Origin			Repl.for 11.33460.3XX				Repl.by				Ref.					