

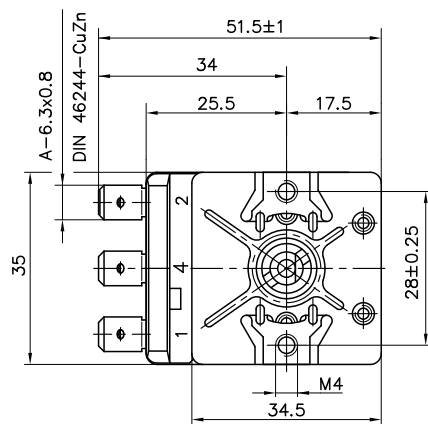
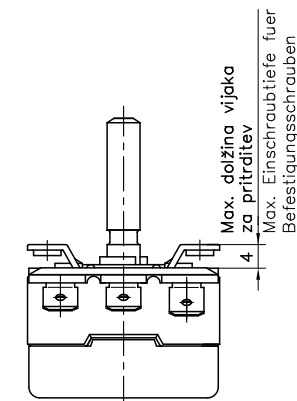



Termostat je narisan v položaju z zasukom osi skrajno levo
Temperaturregler bei Spindelstellung Anschlag links gezeichnet

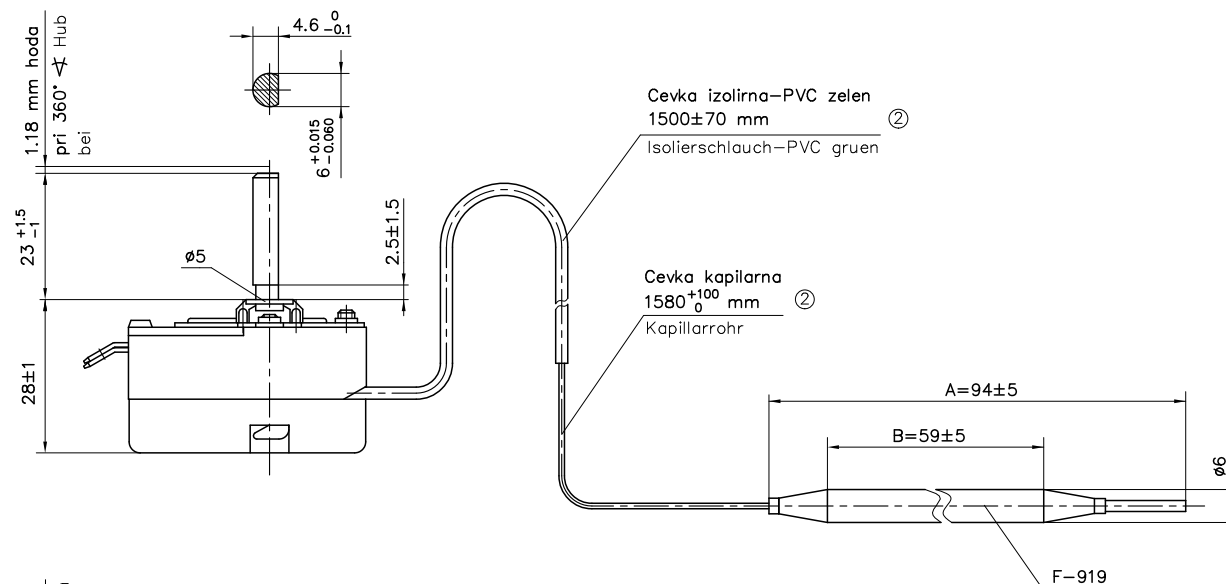

Stikalna shema: v položaju IZKLOP za 1-2
Schaltschema: in AUS-Stellung fuer 1-2



Temperaturne vrednosti
Temperaturwerte:

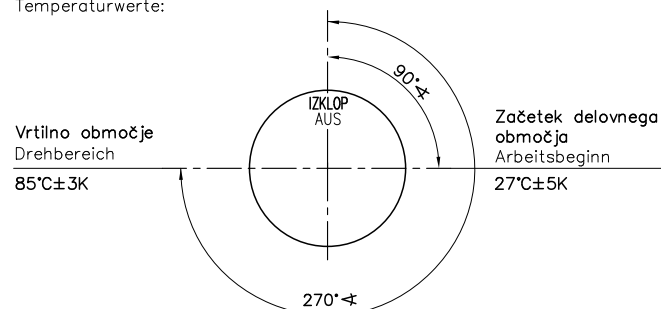

Karakteristike / Bemerkungen

- Podane temperature so: izklopne vrednosti za 1-2
Temperaturen sind: AUS - Werte fuer 1-2
- Stikalna diferenc: 4K ± 2K (v normirani kopeli)
Schaltdifferenz: (im Werksnormbad)
- Min. temperatura čutila: -50°C
Min. Fuehlertemperatur:
- Max. temperatura čutila: 110°C
Max. Fuehlertemperatur:
- Min. krivilni radius kapilare: 5 mm
Min. Biegeradius Kapillarrohr:
- Stikalna zmogljivost: glej ETS 726.016
Schaltleistung nach:
- Podatki za normalno klimo po:
DIN EN 60068-1-(23 ± 2)°C
Normalklima:
- Korekcijski faktor: 0.34 [K/K] pri 270° ± 4 ②
Korrekturfaktor bei 270 WG:
(bezogen auf Umgebungstemperatur)
- Zaskok pri 0° ± 4
Rast bei 0 WG

Površ.hrapavost:			Term.obdelava:			Površ.obdelava:				
			Material:			Tol.prost.mer: ISO 2768-v		Merilo: 1:1		
				Datum	2010.03.31	Ime: TERMOSTAT TEMPERATURREGLER				
				Izdel.	Leskovec <i>Leskovec</i>					
				Risal	Globokar <i>Globokar</i>					
				Stand.						
				Odob.	D.REJC <i>Raje</i>					
②	451.162/10	2010.06.08	<i>Globokar</i>			Št.načrta: ①		Ident.sifra:		List: 1
①	451.110/10	2010.04.15	<i>Globokar</i>			55.13219.107		128815		
	Prva izdaja	2010.03.31	<i>Globokar</i>			CERKNO				
Št.s.	Sprememba	Datum	Ime					Izv.pod.: 721-2V56		Namesto: