

# PERISTALTIC DOSING PUMP

PPR



Seko SpA declares that the pump code PPR0018A1000\_A has the following features:


<b>CERTIFICATION</b>	CE, EAC
<b>TYPE</b>	PPR
<b>POWER SUPPLY</b>	230 Vac +/-10% @ 50/60 Hz
<b>CONSUMPTION</b>	3,5 W
<b>PERISTALTIC TUBE MATERIAL</b>	SANTOPRENE (6x10)
<b>CC/REVOLUTION</b>	2,5
<b>ROLLERS MATERIAL</b>	POM (Polyoxymethylene)
<b>FLOW-RATE</b>	Adjustable 3 - 18 l/h max
<b>GEAR MOTOR</b>	24 VDC – 90 rpm
<b>BACKPRESSURE</b>	0,1 BAR
<b>MPA</b>	0,01
<b>PSI</b>	1,450
<b>GPD</b>	114,12 max
<b>GPH</b>	4,75 max
<b>IP DEGREE</b>	IP 65
<b>OPERATING TEMPERATURE</b>	5-50°C
<b>STORAGE TEMPERATURE</b>	-20÷60°C



## INSTALLATION KIT

<b>FIXING BRACKET</b>	Wall bracket
<b>SUCTION/DISCHARGE</b>	8x12 PVC (4 m roll)

## DIMENSION

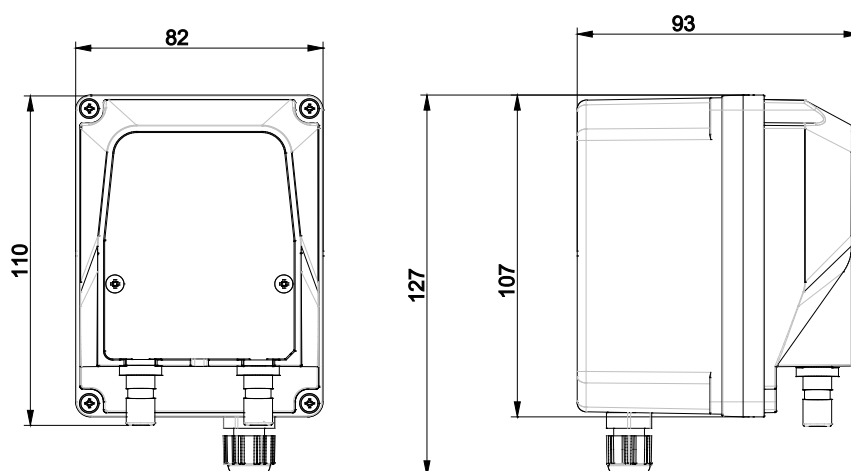

*SEKO spa has taken all reasonable measures about the accuracy of this translation, but regrets that no responsibility can be accepted for any error, omission or inaccuracy. In case of doubt or dispute, as provided by the European Directive, only the original language text is valid.*

Your Choice,  
Our Commitment

Technical data can be changed without notice.  
TD\_PPR0018A1000\_A\_rev.1.0